


Product data sheet

Heat shrink tubing Shrink ratio 3:1 Inner adhesive SB3 series rolls

Item number: HS-SB3




Illustrations may be similar

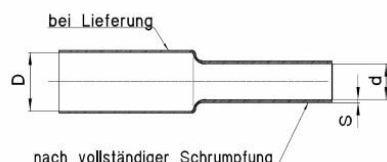

Material:	Adhesive-coated polyolefin tube
Color:	black
Dim. D inches:	1/8; 3/16; 1/4; 3/8; 1/2; 3/4; 1; 1 1/2
Ø before shrinkage / Ø after shrinkage:	12,0 mm / 4,0 mm; 24,0 mm / 8,0 mm; 39,0 mm / 13,0 mm; 4,8 mm / 1,5 mm; 19,0 mm / 6,0 mm; 3,0 mm / 1,0 mm; 6,0 mm / 2,0 mm; 9,0 mm / 3,0 mm
Inner adhesive:	Yes
Wall thickness after complete shrinkage (mm):	0,90; 1,00; 1,25; 1,40; 1,70; 1,95; 2,05; 2,50
Min. shrink temperature:	70°C
Temperature for complete shrinkage:	125°C
Operating temperature:	-45°C bis + 125°C
Approval:	UL, CSA; UL
RoHS III compliant:	Yes
Packaging unit in meters:	100; 50; 25

For individual advice, please feel free to contact us by email:

Subject to changes and errors.



Product link