


Product data sheet

Heat shrink tubing Shrink ratio 4:1 Inner adhesive SB4 series rolls

Item number: HS-SB4



Illustrations may be similar

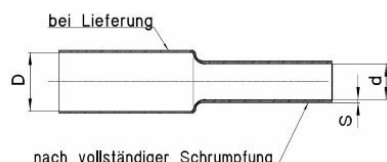

Material:	Adhesive-coated polyolefin tube
Color:	black
Dim. D inches:	1/2; 5/8; 1; 2; 5/32; 5/16; 1-1/4; 1-1/2
Ø before shrinkage / Ø after shrinkage:	4,0 mm / 1,0 mm; 8,0 mm / 2,0 mm; 12,0 mm / 3,0 mm; 16,0 mm / 4,0 mm; 24,0 mm / 6,0 mm; 32,0 mm / 8,0 mm; 40,0 mm / 10,0 mm; 52,0 mm / 13,0 mm
Inner adhesive:	Yes
Wall thickness after complete shrinkage (mm):	3,30; 1,00; 1,50; 1,70; 2,00; 2,60; 3,00
Min. shrink temperature:	70°C
Temperature for complete shrinkage:	125°C
Operating temperature:	-45°C bis + 125°C
Approval:	UL
RoHS III compliant:	Yes
Packaging unit in meters:	100; 25; 150

For individual advice, please feel free to contact us by email:

Subject to changes and errors.



Product link